

ClimSel™ C-18



Transport

Typically used for temperature stabilized transport of frozen products.

Product description

ClimSel™ C-18 is a salt hydrate based Phase Change Material that works by either the charging or discharging of energy at different temperatures. ClimSel™ C-18 is delivered in various sizes of aluminium foil pouches, as a primary packaging. The main components are sodium nitrate, water and additives.

Physical data

| | |
|-----------------------------------|-------------------------------|
| Phase change temperature: Solid | -23°C / -9°F |
| Phase change temperature: Liquid | -18°C / -0.4°F |
| Latent heat of fusion (see curve) | 79 Wh/kg – 283 kJ/kg (+/-10%) |
| Density liquid | 1.4 kg/l |
| Thermal conductivity: Solid | 2.17 W/mK (+/-5%) |
| Thermal conductivity: Liquid | 0.56 W/mK (+/-5%) |
| pH Value | Approx. 6-7 |

Estimated functionality time

ClimSel™ C-18 can be used/cycled as long as the primary packaging is kept uncompromised and it is handled in accordance with usage guidelines. The product will only work as declared for as long as the pouch is intact. The estimated functionality time can be affected by type of application and other external factors.

[Contact Climator for further information.](#)

Usage guidelines

- Recommended storage temperature: 10°C to 25°C / 50°F to 77°F.
- Recommended min. and max. temperature is -30°C to 30°C / -22°F to 86°F.
- Preparation before use depends on application conditions.
- Handle the ClimSel™ C-18 pouch with care and do not bend when solid.
- Do not use damaged pouch, as the product functionality will be compromised.
- The product should not be opened or tampered with.
- If in contact with skin, wash with soap and water.
- If in contact with eyes, immediately flush with plenty of water.

-18°C

Climator is one of the world's leading companies within PCM and temperature stabilization solutions.

Through our know-how, PCM expertise and innovation power, we develop project-based solutions that solve our customers' temperature stabilization and control problems.

We operate within four application areas.



Transport



Room



Body



Equipment

Climator Sweden AB

Mejselvägen 15
SE-541 34 Skövde
SWEDEN

+46 (0)500 48 23 50
www.climator.com
climator@climator.com

Climator
moving energy in time

ClimSel™ C-18

-18°C


Phase change properties

Climator is one of the world's leading companies within PCM and temperature stabilization solutions.


Through our know-how, PCM expertise and innovation power, we develop project-based solutions that solve our customers' temperature stabilization and control problems.

We operate within four application areas.

Part Enthalpy (J/g)

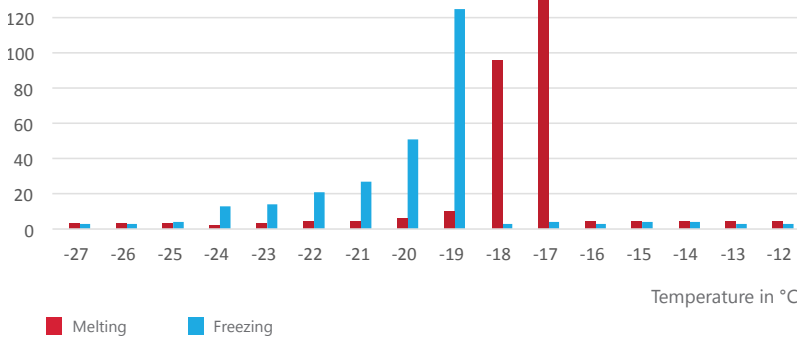

Enthalpy (J/g)

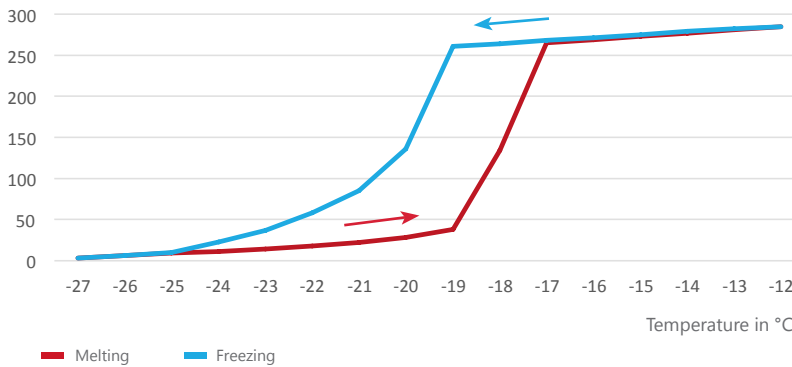

Transport



Room



Body



Equipment

Waste Management

For disposal of the product please contact your federal, state or local waste management organisation. The product should be treated in accordance with requirements for EWC (=European Waste code) = 060314.

Climator Sweden AB

Mejselvägen 15
SE-541 34 Skövde
SWEDEN

+46 (0)500 48 23 50
www.climator.com
climator@climator.com