150610-1

ClimSel^{™C24}







Typically used for temperature stabilized transports of refrigerated products. Also used for passive cooling of buildings and of people/animals.

Typical temperature stabilization span

24°C ←→ 27°C 75°F ←→ 81°F

Product description

ClimSel™ C24 is a salt hydrate based Phase Change Material that works by either the charging or discharging of energy at different temperatures. ClimSel™ C24 is delivered in various sizes of aluminium foil pouches. Its main components are sodium sulphate, water and additives.

Physical data

Phase change temperature: Solid	24°C / 75°F
Phase change temperature: Liquid	27°C / 81°F
Latent heat of fusion (see curve)	40 Wh/kg – 140 kJ/kg
Specific gravity	1.4 kg/litre
Thermal conductivity: Solid	0.74 W/m/°K
Thermal conductivity: Liquid	0.93 W/m/°K

Estimated functionality time

If the products are handled correctly, and the packaging is kept uncompromised, the product will continue to cycle as intended over time, with no known lifetime limit.

Note: $ClimSel^{TM}$ C24 will only work as declared for as long as the pouch is intact.

Usage guidelines

- Recommended storage temperature: 10-20°C / 50-60°F.
- Preparation before use depends on application conditions.
- Handle the ClimSel™ C24 pouch with care and do not bend when solid.
- Do not use damaged pouch, as the product functionality will be compromized.

Damaged products

- If damaged pouch is suspected, it shall be thoroughly inspected before use.
- Damaged products shall be discarded and treated in accordance with federal, state and local requirements for EWC (=European Waste code) = 060314.

Climator is one of the world's leading companies within PCM and temperature stabilization solutions.

Through our know-how, PCM expertise and innovation power, we develop project-based solutions that solve our customers' temperature stabilization and control problems.

We operate within four application areas.



Transport







Climator Sweden AB Mejselvägen 15 SE-541 34 Skövde **SWEDEN**

Phone: +46 (0)500 48 23 50 Fax: +46 (0)500 41 40 42 E-mail: climator@climator.com




150610-1


ClimSel^{™C24}

Phase change performance curves

Part entalphy

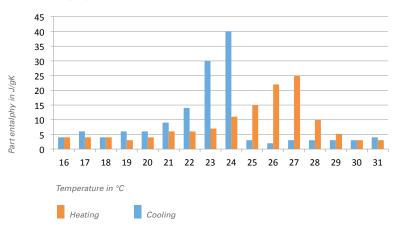

Entalphy

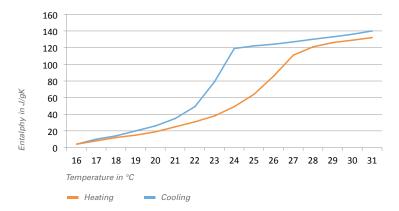

Orange curve shows performance during melting (to be read from left to right). Blue curve shows performance during crystallisation (to be read from right to left). Climator is one of the world's leading companies within PCM and temperature stabilization solutions.

Through our know-how, PCM expertise and innovation power, we develop project-based solutions that solve our customers' temperature stabilization and control problems.

We operate within four application areas.









Climator Sweden AB Mejselvägen 15 SE-541 34 Skövde **SWEDEN**

+46 (0)500 48 23 50 www.climator.com climator@climator.com

